



Application Instructions


Stain Barrier

WHAT YOU NEED:

PAINT ROLLER



8' EXTENSION

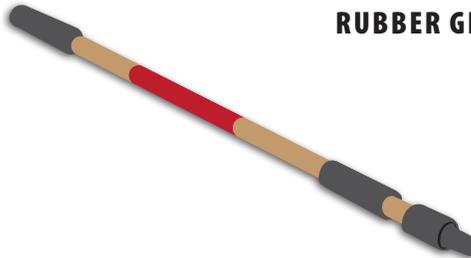

RUBBER GLOVES



FOR NEWLY CONSTRUCTED VINYL POOLS

STAIN BARRIER is applied to the pool rigid wall and bottom surfaces prior to installing the vinyl liner. Application of the coating is best achieved by using a wide latex paint roller with an eight-foot handle. This formulation is water-soluble and should be applied to dry pool wall and bottom surfaces. Do not attempt to apply when there is a possibility of rain either immediately before or four hours after application of the coating. Do not apply if the temperature is below 40 degrees F.

Because of the roughness of most pool base surfaces the coverage of STAIN BARRIER is approximately 125 sq. feet per gallon. An average 25,000 gallon pool should require approximately 10 gallons to cover the walls and bottom.

For best results use the following procedure to apply STAIN BARRIER:

1. Be Sure that all surfaces to be coated are dry.
2. Remove all loose debris clinging to the walls and bottom surfaces.
3. Fill any cracks in the wall and floor of the pool including where the wall and floor meet.
4. Stir STAIN BARRIER thoroughly before applying. Reduce with tap water as required.
5. STAIN BARRIER may be applied by either paint roller or airless spray. If airless spray technique is used the coating may have to be thinned with water in order to apply the coating properly. A nose mask must be worn to avoid inhalation which can cause irritation. If roller application is selected it is recommended that an eight-foot handle be used for ease of application.
6. Apply a uniform coating over all surfaces below the water line of the pool.
7. Allow the coating to dry for approximately four (4) hours before installing the liner.
8. The pool vinyl liner may be installed when coating is dry.

ADDITIONAL PREPARATION IS REQUIRED WHEN REPLACING A VINYL LINER

If a replacement liner is being installed in an old pool, all walls and bottom must be thoroughly cleaned of debris, algae and groundwater stains removed. Any cracks or breaks in the wall and floor of the pool must be filled. It is advised that pool walls and bottom be sterilized with liquid chlorine, thoroughly rinsed and dried prior to applying STAIN BARRIER. After cleaning and sterilizing the walls, follow steps 1 through 8 above.

2294 Old Highway 431
Owens Cross Roads, AL 35763

- (256) 725-2500
- (256) 725-2223
- www.taraliners.com/stainbarrier